

BATHOLOGY

rediscover bathing



Spectrum 620 & 626

Mounted Salt Panel

Installation and Operation Manual

Contents

Installation Considerations -----	3
Installation - Overivew -----	4
Installation - Himalayan Salt Panel -----	5
Specifications -----	6
Replacement Parts -----	6
Notes -----	7

Installation Considerations

Please read this manual in its entirety prior to installation

CAUTION Carefully review all installation options and instructions before proceeding.

CAUTION For safety purposes, use safety goggles at all times.

WARNING If there is any risk of uninsulated electrical connections in your wall / ceiling area, use insulating gloves.

! IMPORTANT Prior to installation, consider the placement carefully, taking into account the location of electrical, plumbing, and other fixture

! IMPORTANT The Spectrum 620 requires minimum of 4” at both ends to insert or remove center salt block for mounting or removing panel.


Spectrum 620 & 626

Installation - Overview

Note: It is recommended that all electrical equipment be tested prior to installation.

Note: Illustration below showcases Spectrum 620 Himalayan Salt Panel Assembly which measures 48x12. Spectrum 626 is similar, but measures 16x16. Surface mount shown.

Sauna Environment

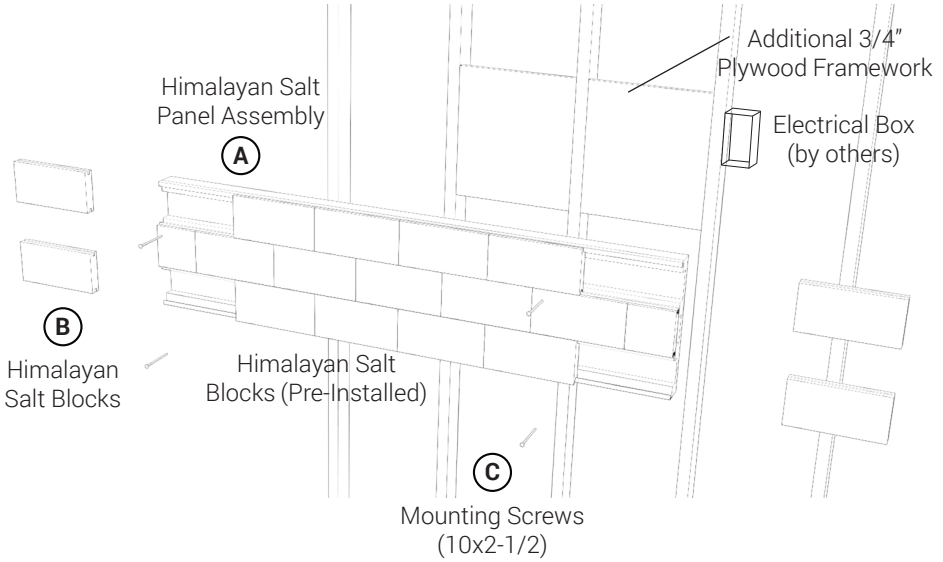

Package Includes

Spectrum 620		
Item	Quantity	Description
A	1	Himalayan Salt Panel Assembly (Salt Pre-Installed)
B	4	Himalayan Salt Blocks
C	4	Mounting Screws (10x2-1/2)
D	4	Trim Boards (not shown)

Spectrum 620		
Item	Quantity	Description
A	1	Himalayan Salt Panel Assembly (Salt Pre-Installed)
B	4	Himalayan Salt Blocks
C	4	Mounting Screws (10x2-1/2)
D	4	Trim Boards (not shown)

Installation - Himalayan Salt Panel

1. From determined Salt Panel Assembly (A) location, mark a level line for height of Salt Panel Assembly (A). (Helpful Tip: Use a piece of 2x4, level and secure to wall at determined height temporarily to be used as a ledger to support Salt Panel Assembly (A))
2. The Salt Panel Assembly (A) fixture may weigh up to 55 lbs. and require additional framework or support. $\frac{3}{4}$ " Plywood is recommended to help support the weight of the fixture(s). See diagram on page 4.
3. Mount Salt Panel Assembly (A) onto wall securing with provided Mounting Screws (C) into predrilled mounting holes.
4. After mounting Salt Panel Assembly (A) slide in 4 Salt Blocks (B) over Mounting Screw (C) locations.
5. Repeat this process for each additional Himalayan Salt Panel Assembly, if any.
6. Trim Boards (D) have been supplied for either recessed or surface installations.

Specifications

Salt Block

Composition: Himalayan Salt

Dimensions: 3-7/8" x 7-7/8"

Himalayan Salt Panel

Dimensions (620): 11-5/8" H x
47-1/4" W x 2-5/8" D

Dimensions (626): 15-1/2" H x
15-3/4" W x 2-5/8" D

Composition: Maple Plywood,
Aluminum

Mounting Screws

Size: #10 x 2-1/2"

Replacement Parts

Contact your Bathology
representative for Spectrum
620 / 626 Mounted Salt Panel
replacement parts.

800-957-2862

www.Bathology.com

BATHOLOGY

rediscover bathing

www.Bathology.com 800-957-2862

A division of Bathing Brands, Inc.