

## **FIT-220 Fitting Package**

### **For models:**

SSM-ACR, SSM-84, SSM-140, SSM-240, SSM-395, SSM-500,  
SSA-ACR, SSA-84, SSA-140, SSA-240, SSA-395, and SSA-500  
PROI-84, PROI-140, PROI-240, PROI-395  
PROII-84, PROII-140, PROII-240, PROII-395, PROII-575, PROII-750,  
PROII-1200

### **Package contents:**


- A. (1) 3/4" F NPT x 3/4" F NPT Brass Union
- B. (2) 1/2" F NPT x 1/2" F NPT Brass Unions
- C. (1) 1/2" x 3/8" Reducer
- D. (2) 1/2" C NPT x 1/2" M NPT Copper Adapters
- E. (3) 3/4" C NPT x 3/4" M NPT Copper Adapters
- F. (1) 1/2" C x 1/2" C Brass Water Supply Ball Valve
- G. (1) Teflon Tape Roll

### **Installation:**

This package contains the appropriate fittings and valves to ensure a professional plumbing installation. As each steam generator installation and corresponding plumbing runs is unique, common 1/2" (drain, steam, and water) and 3/4" (pop safety) copper tubing and fittings can be purchased from a local hardware source to complete your installation. This package provides the essential copper and brass components necessary for a serviceable and fully removable steam generator installation.

Verify package contents (listed above) with **Image A**. Locate appropriate fittings in installation **Image B**. Install as detailed using provided Teflon tape on all threaded fittings. While installing fitting package, attempt to locate unions near generator for easy access.

**Image A**

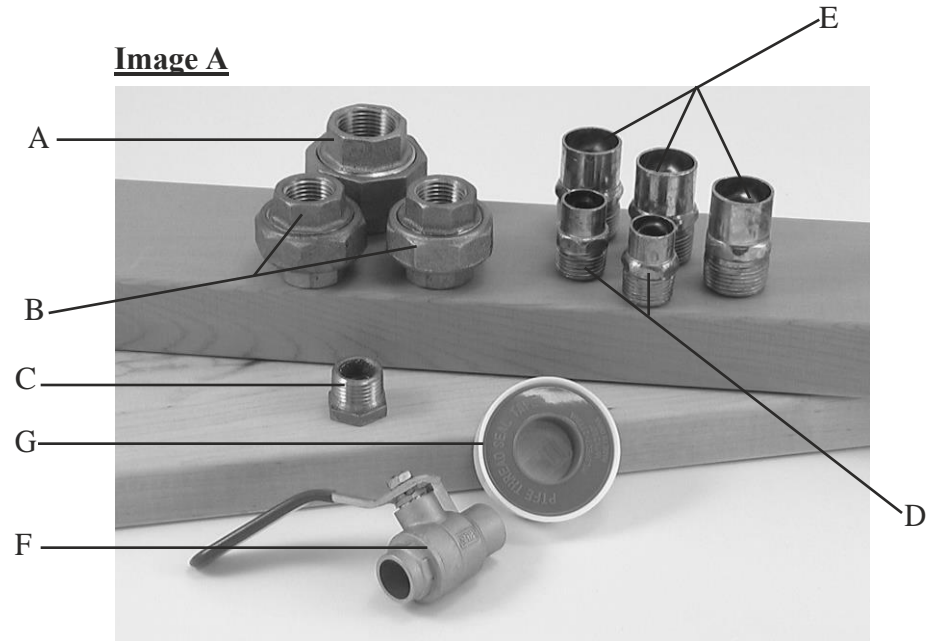

**Image B**

