

# **SPECIFICATIONS – Signature Control**

Construction......Black or White Acrylic
Display......5" Capacitive Touch screen
Display Full Color..........16.7M
Display resolution.......480 x 800
Interface........Single Touch

### Signatouch Series operational features:

- Digital Shower
  - Operates flow, temperature, and output
- Steam Shower
  - Operates time, temperature, and auto powerflush
- · Light Sound and rainhead
  - Control linked Bluetooth device
  - Control moodlight, shower light, and chromatherapy.

### **Signatouch Series features:**

- Can be mounted vertically or horizontally
- 2 user settings
- 2 finishes

#### **Installation Notes:**

The control should be installed 60" inches from the floor of the shower, inside the shower only, and away from the steam head.

### **Finish Chart:**

replace -xxx with code in part number STC-xxx.
WHT = White | BK = Black

4.8"

# **Product Specification:**

The user interface control shall be 5.6" x 3.5" x 0.65" in dimension. The Control shall be made from black or white acrylic(-BK,-WHT) and includes the ability to operate and control: Smart Steam, Fast Start, Auto PowerFlush, Light and Sound System. By using a 100% networked digital technology.

### **Shipping Information:**

Weight	1.25 lbs.
Length	9.5 in.
Width	6.5 in.
Height	2.5 in.


tact ThermaSol at

1.25"

For any further assistance please contact ThermaSol at 800.776.0711 or sales@thermasol.com

Visit www.thermasol.com for a complete product definition





## SPECIFICATIONS - POWER DISTRIBUTION MODULE

### **Basic Functions:**

- Distributes DC Power and Digital signals to system modules:
- Serenity Light, Sound and Rainhead
- ThermaTouch or Signature Series Controls
- Solitude Wireless Module SWM-2 (signal only)
- Steam Generator (signal only)

### **Installation Notes:**

Overall size is approximately 5-3/4" long by 3-3/4" wide and 1-1/2" high. (Without connections) Allow space; 3" Min. for connections. Unit consists of a low voltage (24VDC) circuit board inside a box that can be placed up to 25 feet from the Light and Sound fixture or up to 50 feet from the Steam Generator. A separate universal voltage Power Adapter is provided (03-7142), it requires a standard 110V AC two prong wall outlet.


## **Product Specification:**


5-3/4"L x 3-3/4"W x 1-1/2"H Body. This PDM requires a Thermasol Steam Generator and/or Light and Sound System and separate power supply for proper operation.

For any further assistance please contact
ThermaSol at 800.776.0711 or
sales@thermasol.com

## **Shipping Information:**

Weight	4 lbs.
Length	11 in.
Width	14 in.
Haight	Q in

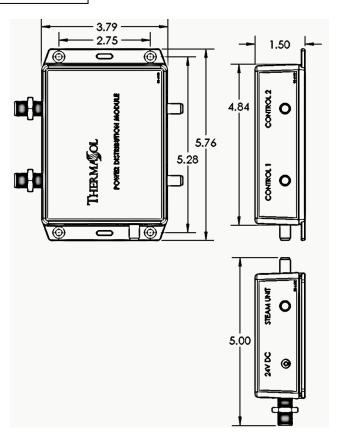



## SPECIFICATIONS - Light and Sound Rain System

Construction	Machined Brass
Controllability	ThermaTouch Series Controls
Function Lights	200 Full-color luminous LED
Lumens (Max)	1600
Rainhead Water Supply	3/8", 40-80 PSI, 1.8GPM
Water Jets	300
CEC Approved	

### Lighting

- 200 Full-color luminous LED (R,G,B,W)
- Color Changing "Mood Lighting"
- Preset Chromatherapy Chakras
- Custom user programmable "any color"

#### Audio

- Amplifier: 100Watt RMS, built in Digital Signal Processor
- Built-in Bluetooth v4.2
- 2-1" Titanium Dome Tweeter with Ferro fluid cooled aluminum voice coil
- 1- 4" woofer
- 1-4" passive radiator

## **Installation Notes:**

Overall size is  $18.0^\circ$  SQ X  $8.0^\circ$  tall and requires approx.  $16.7^\circ$  X  $16.7^\circ$  cutout in the shower ceiling. The unit is self-contained as one piece and extends into the ceiling space  $8.0^\circ$  plus plumbing connection clearance. Use a  $3/8^\circ$  compression fitting and a flexible potable waterline to connect to the Rainhead. Use only potable water and approved plumbing fittings for any shower connection. Refer to ThermaSol Installation Instructions for a full-sized template and detailed installation and operation instructions.


### Finish Chart:


Select desired finish and replace XX with code.


PC = Polished Chrome
SC = Satin Chrome
PB = Polished Brass
SB = Satin Brass
AB = Antique Brass
COP = Polished Copper
ACOP = Antique Copper
WHT = White

## **Product Specification:**

A self-contained, Light and Sound Rainhead module that creates high-intensity chromatherapy lights and sounds. Rainhead is rated at 1.8 GPM Max. at 80 PSI and requires a separate diverter port with shut off valve. Powered by: provided 24V DC, 30 Watts power supply.








For any further assistance please contact ThermaSol at 800.776.0711 or sales@thermasol.com

Visit <u>www.thermasol.com</u> for a complete product definition











## SPECIFICATIONS - SteamVection Steam Head

Construction...... Brass
Aromatherapy...... Integral Reservoir

## **Installation Notes:**

The steam head should be installed 24 inches from the floor, and 6 inches from any corner, inside the shower only, and as far away from the controller and shower fixtures as possible.

The steam head housing requires a 1-1/8" hole in the shower wall, and must be flush with the finished wall and sealed to the wall to not allow vapor or water behind it. Use ½" copper fittings to attach the housing to the steam outlet. See the full steam head housing instructions within your generator installation guide.

## **Product Specification:**

The steam head shall be approximately 1.75" x 1.75" in the square version, and a 1.75" Dia. For the round version. The steam head is made from brass alloy and includes an aromatherapy well.

## **Shipping Information:**

 For any further assistance please contact
ThermaSol at 800.776.0711 or
sales@thermasol.com

#### Finish Chart:

Select desired finish and replace XX with code. No-Touch Aromatherapy steam head and control finishes.

PC = Polished Chrome

SC = Satin Chrome

PB = Polished Brass

SB = Satin Brass

AB = Antique Brass

COP = Polished Copper

ACOP = Antique Copper

MB = Matte Black

PN = Polished Nickel

SN = Satin Nickel BN = Black Nickel

AN = Antique Nickel

PG = Polished Gold

ORB = Oil Rubbed Bronze

WHT = White

