



SHIPPING WEIGHT

Weight | 1.8 lbs.

Length | 11 in.

Width | 14 in.

Height | 8 in.

FINISH CHART*

PC | Polished Chrome

SC | Satin Chrome

PB | Polished Brass

SB | Satin Brass

AB | Antique Brass

COP | Polished Copper

ACOP | Antique Copper

ORB | Oil Rubbed Bronze

PN | Polished Nickel

SN | Satin Nickel

MB | Matte Black

AN | Antique Nickel

BN | Black Nickel

PG | Polished Gold

BK | Black

WHT | White

* If selecting "WHT" or "BK" finish replace -XX with code in part number STC-XX. All other finishes replace the -XX in part number STCU-XX.

THERMATOUCH CONTROL

TT10-XX

The ThermaTouch Control is a 10" LCD Touchscreen Control used to operate other ThermaSol modules such as Steam Room functions, Light, Sound and Tranquility Visualization, Stereo Audio output and Ethernet connection. The control is approx. 10-2/5" Wide X 7-1/10" High X 2-3/10" Deep. It requires a wall cutout 10-2/5" Wide X 7-1/10" High and must have a clear in wall depth of 3-1/2".

FEATURES

- Choose and download from a menu of 20 of the most popular Apps; shows, news, weather, video content, music and more
- Fully waterproof, ThermaTouch Plus can be installed anywhere: a shower, bathing area, patio, etc.
- Built-in Bluetooth®
- Ethernet connection
- WiFi-enabled capabilities ensure that users automatically receive any updates to the software right to the controller, in-home after purchase.


- Powered by Android[™]
- Stereo audio output
- Alexa compatible (Available Summer 2019)
- Date and Time display
- Set steam time and temperature
- Set and control preferences for two users
- Operates: steam, digital shower, light, sound and rain head.


SPECIFICATIONS


Construction | Acrylic or 6061 Aluminum
Controllability | Steam, Light & Sound
Audio Out | 1/8" Barrel Jack

Power Supply | ThermaSol PDM (10-8147) Display | 10" Wide LCD Touch Screen

PN: 92030







INSTALLATION NOTES

- Refer to ThermaSol installation Instructions Doc No. 81190 for complete instructions.
- Requires wall cut out opening of 9.75" Wide X 6.375" High X 3.125" Deep.
- Use Mud Ring for Tile installation and ThermaTouch Control placement (04-8544).
- Ensure 3-1/2" clearance behind the rear of the control for cable clearance.
- The control should be installed 60" inches from the floor and 6" from any wall and as far away from the steam outlet as possible.





SLSRXX-XX Serenity Light and Sound Rain System







SPECIFICATIONS - Light and Sound Rain System

SQUARE ROUND

Lighting

- 18 special high intensity LED Lights (R,G,B)
- Full color spectrum- All on = white light
- · Color Changing "Mood Lighting"
- Preset Chroma Therapy Chakras
- Custom user programmable "any color"
- Voice Response Feedback

Audio

- · Multi-Channel Hi-Power Mosfet Amplifier
- Built-in Subwoofer
- · High-frequency Tweeters
- Voice Response Feedback
- · Bluetooth module
- RCA audio input

Installation Notes:

Overall size is 10.0° SQ or Dia (if round) X 7.5° Tall X 5.5° Wide, and requires approx. 7.00° X 5.75° cutout in the shower ceiling. The unit is self-contained as one piece and extends into the ceiling space 7.0° plus plumbing connection clearance. Use a $3/8^\circ$ compression fitting and a flexible potable waterline to connect to the Rainhead. Use only potable water and approved plumbing fittings for any shower connection. Refer to ThermaSol Installation Instructions for a full-sized template and detailed installation and operation instructions.

Finish Chart:

Select desired finish and replace XX with code.

PC = Polished Chrome

SC = Satin Chrome

PB = Polished Brass

SB = Satin Brass

AB = Antique Brass

COP = Polished Copper

ACOP = Antique Copper

PN = Polished Nickel

SN = Satin Nickel

BN = Black Nickel

MB = Matte Black

AN = Antique Nickel

PG = Polished Gold
ORB = Oil Rubbed Bronze

JKB = Oli Kubbeu Broli

WHT = White


Product Specification:


A self-contained, Light and Sound Rainhead module that creates high-intensity chromatherapy lights and sounds. Rainhead is rated at 1.8 GPM Max. at 80 PSI and requires a separate diverter port with shut off valve. Powered by: provided 24V DC, 30 Watts power supply.

Shipping Information:

Weight...........13 lbs. Length...........15 in. Width...........15 in. Height..........14 in. For any further assistance please contact ThermaSol at 800.776.0711 or sales@thermasol.com

Visit <u>www.thermasol.com</u> for a complete product definition



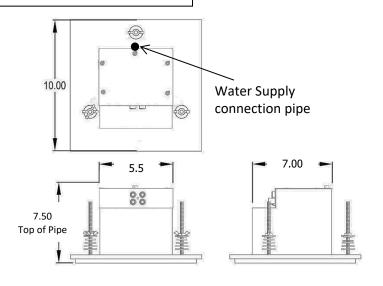









SPECIFICATIONS - SteamVection Steam Head

Construction...... Brass
Aromatherapy...... Integral Reservoir

Installation Notes:

The steam head should be installed 24 inches from the floor, and 6 inches from any corner, inside the shower only, and as far away from the controller and shower fixtures as possible.

The steam head housing requires a 1-1/8" hole in the shower wall, and must be flush with the finished wall and sealed to the wall to not allow vapor or water behind it. Use ½" copper fittings to attach the housing to the steam outlet. See the full steam head housing instructions within your generator installation guide.

Product Specification:

The steam head shall be approximately 1.75" x 1.75" in the square version, and a 1.75" Dia. For the round version. The steam head is made from brass alloy and includes an aromatherapy well.

Shipping Information:

 For any further assistance please contact
ThermaSol at 800.776.0711 or
sales@thermasol.com

Finish Chart:

Select desired finish and replace XX with code. No-Touch Aromatherapy steam head and control finishes.

PC = Polished Chrome

SC = Satin Chrome

PB = Polished Brass

SB = Satin Brass

AB = Antique Brass

COP = Polished Copper

ACOP = Antique Copper

MB = Matte Black

PN = Polished Nickel

SN = Satin Nickel BN = Black Nickel

AN = Antique Nickel

PG = Polished Gold

ORB = Oil Rubbed Bronze

WHT = White

