

TempoTouch® Control

TempoTouch control must be surface mounted in the steam/shower enclosure through a 1-1/8" [28.5mm] diameter hole.

TempoTouch Control Feature:

- Solid decorative bezel with choice of designer finishes
- Touch ON/OFF button
- Arc swipe to change temperature
- Steamhead in matching finish
- Temperature Setting Indicator

The TempoTouch control are designed to be installed inside or outside the steam room but is primarily installed inside the steam room. If the control is installed inside the steam room the control must be located:

- 4-5 ft. (1.2 – 1.5m) above the floor
- in a location representative of the desired steam bathing temperatures. Do not locate the control above or near the steam head or direct steam emissions
- on a vertical wall.

The control cable length is 30 ft. [9m]. Insure that the control and/or steam generator are located accordingly.


An optional 60 ft. [18m] cable is available if required, PN 104678-60.

If the control is installed outside the steam room a Remote Temperature Probe Part Number MST5 must be installed inside the steam room.

BOX CONTENTS:

- TempoTouch
- Tube of Silicone Sealant
- Steamhead
- Owner's Manual
- Control Cable (30 ft.) (9m)

Dimensions for Round & Square Controls:

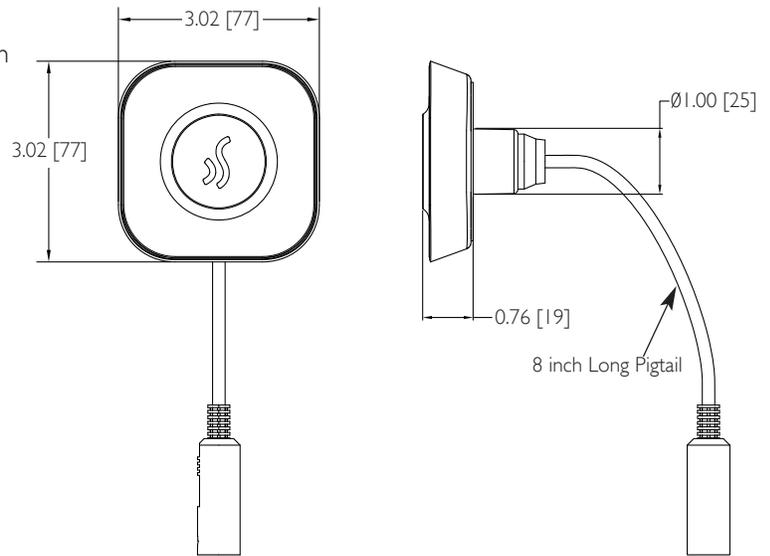

FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION

visit mrsteam.com before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

MODEL	FINISH	PROJECT INFORMATION
TempoTouch	<input type="checkbox"/> BB - Brushed Bronze	Location:
	<input type="checkbox"/> BL - Brilliant Black	
	<input type="checkbox"/> BN - Brushed Nickel	Architect:
	<input type="checkbox"/> MB - Matte Black	Engineer:
	<input type="checkbox"/> NB - Nouveau Bronze	Contractor:
	<input type="checkbox"/> ORB - Oil Rubbed Bronze	Submitted By:
	<input type="checkbox"/> PB - Polished Brass	Date:
Notes:		